





Ultra Thin Hall Sensor

Technical Specifications

- 250 μm total thickness Ultra Thin Hall Sensor
- 500x500 μm active area (Different active areas can be supplied)
- Flexible leads
- Transverse Field
- Maximum Field : ± 1 Tesla

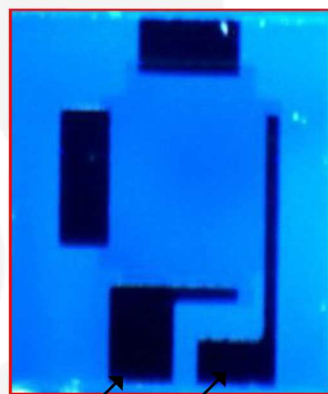

Gold Contact Pads

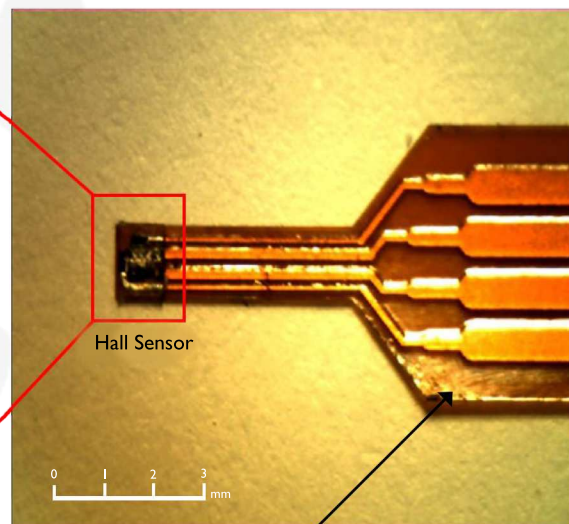

Hall Sensor

Flex PCB